

**AGILE
OFFROAD**
SMARTER THAN DIRT™






**SUPPLEMENTAL INSTRUCTIONS
ACGB 48.9 GALLON FUEL TANK
VENT LINE INSTALLATION
VS30 SPRINTER (2019+)**

GENERAL INFORMATION

Use this supplemental instruction guide to plumb the vent lines on your 48.9 Gallon ACGB Fuel Tank.

**Note: Overfilling the fuel tank will cause the fuel to exit and spill out of the vent tube.



PARTS INCLUDED

- 1x 3/8 in. x 30 in. clear vent tube 
- 1x 3/8 in. x 15 in. clear vent tube 
- 1x 3/8 in. x 8 in. clear vent tube 
- 4x 3/8 in. x 2 in. clear tube 
- 4x 5/16 in. ID x 3/4 in. sleeve 
- 2x 3/8 in. white plastic T-fitting
- 1x 3/8 in. black plastic T-fitting
- 4x steel hose clamps
- 2x zip ties

1. Install one 5/16 in. ID x 3/4 in. long tube on each tank vent valve.



2. Use supplied 3/8 in. plastic T-fittings and (2) 3/8 in. x 2 in. clear tubes and route vent tube as shown below. Use tape (not supplied) to position the vent tubing away from the mounting holes and fuel sender.

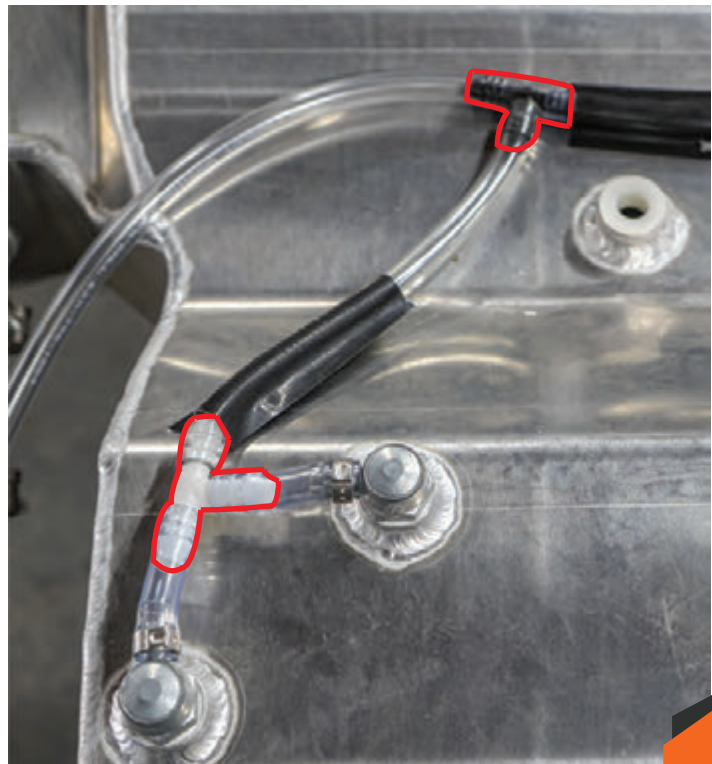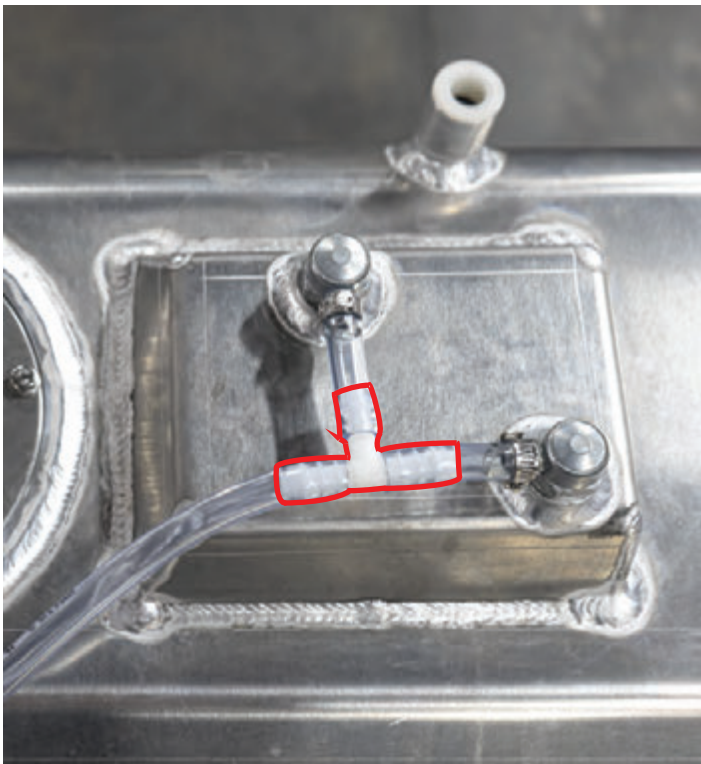

3. Use supplied zip ties to attach the open end of the vent tube to the fuel filler, as shown below.



4. The final vent tubing assembly and routing is shown below. All vent tubing is clear. Color is for reference only.

